


55 Inch Embedded Outdoor Transit Displays (Double-sided)**KEY FEATURES**

A+ LCD IPS Panel
 1920x1080 up to 3840x2160
 Brightness ≥ **2000** nits
 7*24 Hours working uninterrupted

Energy-saving WLED backlight
 Weather-proof, Sunlight readable,
 Auto-Light sensor, anti-vandalism,
 Anti-radiation, Anti-electromagnetic,
 Protective: 6-8 mm tempered glass.

Optional:


1. Player alone / Network / Touchscreen
2. IP Rating: IP55 | IP67
3. OS: Windows / Android / Linux / None
4. Color Options: Grey, White, Black...

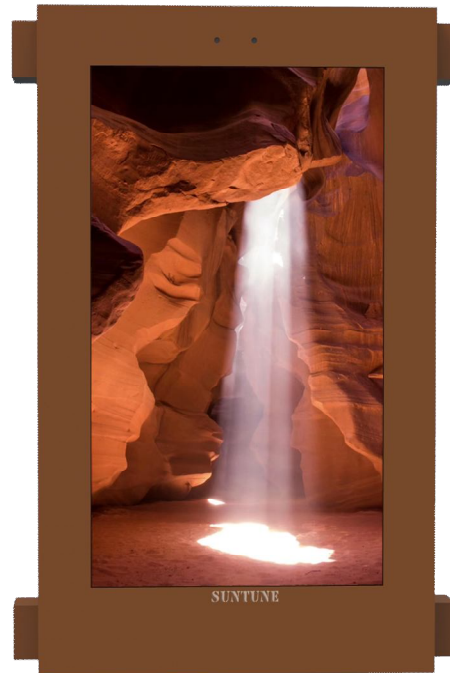PICTURE**Specification Table:**

Digital Display Size		55"
Model Number		ST- TBS-W55ED
PANELS	Panel Type	A+ LCD IPS Panel 55 inch
	View Area	1209.6×680.4mm (W*H)
	Aspect Ratio	16:9
	Backlight	Patented LED module, Constant power components
	Resolution	1920x1080 Max to 3140x2160 (4K)
	Display Colors	16.7M / 1.07B
	Brightness	2000+ nits Sunlight-readable, Max to 5000 nits
	Contrast Ratio	≥1400:1
	Visual Angle	178°(H) / 178°(V)
	Response Time	≤5ms
	S-System	PAL / NTSC / SECAM
	Life Expectancy	60000 Hours
FUNCTIONS	Operation System	Windows, Android, Linux
	Network	Ethernet, Wi-Fi, 4G, 5G, etc
	Network Protocol	TCP IP/PPPOE/ICMP/DHCP/DNS/FTP/HTTPS
	Audio Format	MP3,WMA,AMR,OGG,AAC,WAV,FLAC,APE
	Video Format	MP4,3GP,MPG,AVI,WMV,FLV,SWF,RMVB,MKV,VOB
	Image Format	JPG,BMP,PNG,TIF,ICO,GIF,TGA
	Log Management	Support terminal log and playlist log
	Supportive	Player Alone, Network, Touch Screen

HARDWARE	Materials	Cold-rolled metal plate + special Outdoor Powder
	Color Options	Silver, Grey, White, Black or customized
	Heat Control	Industrial Air-cooling system Air-conditioner system
	Tempered Glass	6-8 mm (AG, AR or Laminated only in requirement)
	IP Rating	Air-cooling≤IP55 Optical Bonding≥IP67
	Speakers	2*10W Stereo
	I/O Connectivity	DP, HDMI, RJ-45, USB, SD Card
	Dimensions	1560x930x260 MM, Customizable
	N.W / G.W	148KG / 164 KG (for Reference)
	Certificates	ISO9001/CCC/CE /FCC/RoHS/IP65
	Accessories	Remote Control, Power Cord, Wires, Key, Rack, Instruction, Approval Certificate, Warranty Card
ENVIRONMENT	Operation Temp	-30°C to 55°C
	Storage Temp	-35°C to 60°C
	Working Humidity	5% to 95%
	Storage Humidity	15% to 95%
POWER	Power Voltage	AC100V-240V (50/60Hz)
	Consumption	700W – 1.3kW
	Standby	≤3W
	Power Mode	Manual Automatic Timer-setting On or Off

ILLUMINATION DRAWING (For REFERENCE)

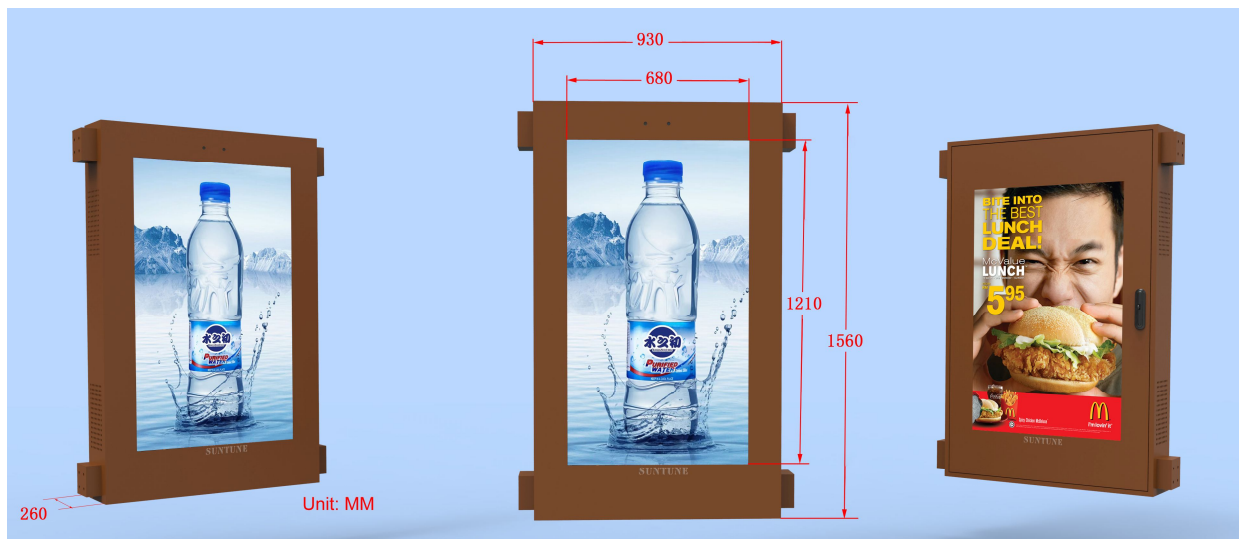

(Depth is changeable due to different heat-control system)

DECLARE:

Pictures and Parameters here are for reference only. All referred to physical products. SUNTUNE SignageHub has the rights for final explanations.

55 Inch Embedded Outdoor Transit Displays (Double-sided)