

49 Inch 2x2 Modular Outdoor Video Walls

KEY FEATURES

A+ LCD IPS Panel 49 inch
FHD 1920x1080
Bezel Seam: **4.1 mm**
Brightness: **2000-3500 Nits**
7*24 Hours working uninterrupted


IP-rated weatherproof design,
Built for all climates,
Easy installation and maintenance,
Remote content management,
Ideal for high-traffic environments.

Player alone / Network
IP Rating: IP55 / IP65
Supportive to IR and RS232 control

PICTURE



Interface Figure

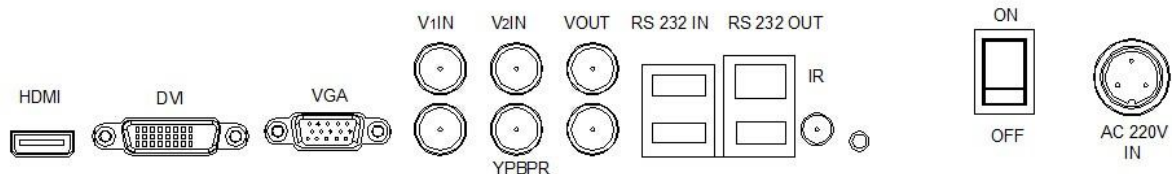


Specification Table:

Video Wall Panel Size		49"
Unit Model NO.		ST- OVW-P49LA
P A N E L	Panel Type	A+ a-Si TFT-LCD IPS Panel 49 inch
	Active Area	1074.2×604.3 mm (W*H)
	Aspect Ratio	16:9
	Backlight	WLED + Constant power components
	Resolution	1920×1080 FHD
	Color Depth	16.7M 75% NTSC
	Brightness	2000+ Nits
	Contrast Ratio	1200:1
	Visual Angle	178°(H) / 178°(V)
	Response Time	≤ 8ms
	Splicing Seam	4.1 mm (active to active seam)
	Signal Type	LVDS
	Treatment	Antiglare, Hard coating
	Life Expectancy	60000 hours

I/O INTERFACE	VGA	1
	DVI	1
	HDMI	1
	RS232 in	1 (RJ45 converter)
	RS232 out	2 (RJ45 converter)
FUNCTIONS	Play Mode	Splicing (One signal to all screens)
	Network	Ethernet, Wi-Fi, 4G, 5G, etc
	Audio Format	MP3,WMA,AMR,OGG,AAC,WAV,FLAC,APE
	Video Format	MP4,3GP,MPG,AVI,WMV,FLV,SWF,RMVB,MKV,VOB
	Image Format	JPG,BMP,PNG,TIF,ICO,GIF,TGA
HARDWARE	Materials	Cold-rolled metal plate + special Outdoor Powder
	Heat Control	Industrial Air-cooling system Air-conditioner system
	Tempered Glass	6-8 mm (AG, AR or Laminated only in requirement)
	IP Rating	Air-cooling≤IP55 Air-conditioner≥IP65
	Speakers	2*10W Stereo
	I/O Connectivity	DP, HDMI, DVI, VGA, USB, LAN, Wi-Fi
	Dimensions	2700x2450x400 MM, Customizable
	Gross Weight	260 KG (for Reference)
	Accessories	Remote Control, Power Cord, Wires, Key, Rack, Instruction, Approval Certificate, Warranty Card
OPERATION	Working Temperature	-30℃~55℃
	Storing Temperature	-35℃~60℃
	Humidity	5%~95%
	Power Voltage	AC100-240V, 50 / 60HZ
	Power Consumption	1kW~1.5kW Due to heat-control system
	Power Mode	Manual Automatic Timer-setting On or Off

ILLUMINATION DRAWING

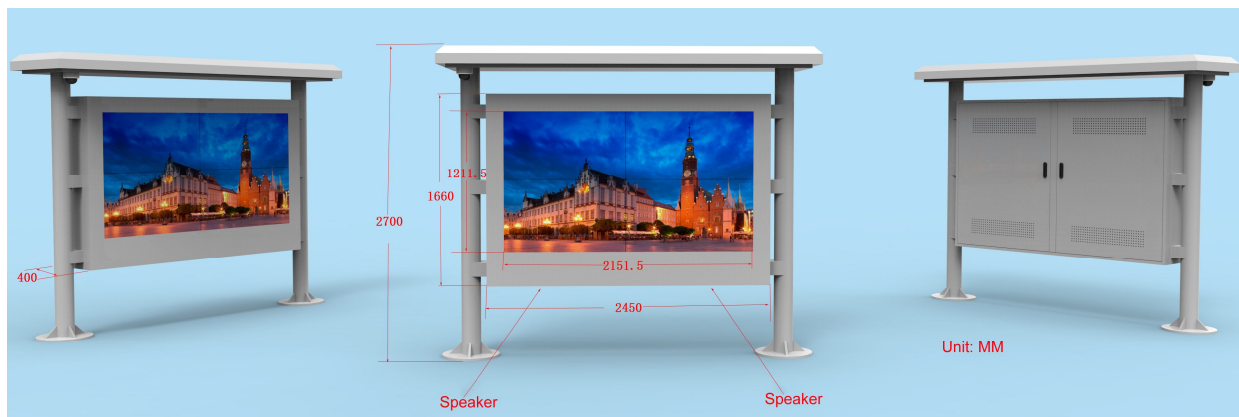

(Dimensions might be adaptable by different enclosures and heat-control systems)

**Pictures & Parameters here are for reference only. All referred to physical Products.
Final explanations belong to SUNTUNE SignageHub.**

Website: www.suntunesignage.com Hotline: (+86) 188-2025-4103 Email : info@suntunesignage.com

Address : Bldg F10, Gangshen Center, Xinniu Rd, Minzhi Str, Longhua Dist., Shenzhen 518131, Guangdong, China.

49 Inch 2x2 Modular Outdoor Video Walls (Reference)