

Outdoor 75 inch Wall-mounted Rainproof Advertising Display

KEY FEATURES

A+ LCD IPS panel
1920x1080 FHD, MAX to 3840x2160 (4K)
Brightness ≥ **2500** nits
7*24 Hour working uninterrupted

Energy-saving WLED backlight
Weatherproof, Vandal-proof, Dustproof
Sun-readable, Auto-light sensor
Anti-radiation, Anti-electromagnetic
Protective: 6-8 mm tempered glass

Optional:

1. Player alone / Network / Touchscreen
2. Fan-cooling≤IP55 | Air-conditioning≥IP65
3. OS: Windows / Android / Linux / None
4. Color Options: Grey, White, Black...

PICTURE




Specification Table:

Digital Signage Size		75"
Model Number		ST-WPD-W750R
PANELS	Panel Type	A+ LCD IPS Panel 75 inch
	Active Area	1649.7x927.9mm(W*H)
	Aspect Ratio	16:9
	Backlight	Patented LED module + Constant power components
	Resolution	UHD 3840x2160 compatible to 1920x1080
	Display Colors	16.7M/1.07B 87% (CIE1931)
	Brightness	2500+ nits Sunlight-readable
	Contrast Ratio	1400:1
	Visual Angle	178°(H) / 178°(V)
	Response Time	≤ 5ms
	S-System	PAL / NTSC / SECAM
	Life Expectancy	60000 Hours
FUNCTIONS	Operation System	Windows, Android, Linux
	Network	Ethernet, Wi-Fi, 4G, 5G, etc
	Network Protocol	TCP IP/PPPOE/ICMP/DHCP/DNS/FTP/HTTPS
	Audio Format	MP3,WMA,AMR,OGG,AAC,WAV,FLAC,APE
	Video Format	MP4,3GP,MPG,AVI,WMV,FLV,SWF,RMVB,MKV,VOB
	Image Format	JPG,BMP,PNG,TIF,ICO,GIF,TGA
	Supportive	Player Alone, Network, Touch Screen

HARDWARE	Materials	Cold-rolled metal plate + special Outdoor Powder
	Color Options	Silver, Grey, White, Black or customized
	Heat Control	Industrial Air-cooling system Air-conditioner system
	Tempered Glass	6-8 mm (optional in RG, AG, AR or Laminated)
	IP Rating	Air-cooling $\leq$ IP55 Air-conditioner $\geq$ IP65
	Speakers	2*10W Stereo
	I/O Connectivity	DP, HDMI, RJ-45, USB, Customizable
	Dimensions	1890x1228x180 MM (for Reference)
	N.W / G.W	221KG / 265 KG
	Certificates	ISO9001/CCC/CE /FCC/RoHS/IP65
	Accessories	Remote Control, Power Cord, Wires, Key, Rack, Instruction, Approval Certificate, Warranty Card
ENVIRONMENT	Operation Temp	-20°C to 55°C
	Storage Temp	-35°C to 60°C
	Working Humidity	10% to 90%
	Storage Humidity	10% to 90%
POWER	Voltage	AC 100V - 240V
	Consumption	$\leq$ 1400W (Depending on the heat-control system)
	Standby	$\leq$ 3W
	Power Mode	Manual Automatic Timer-setting On or Off

Illumination Drawing:

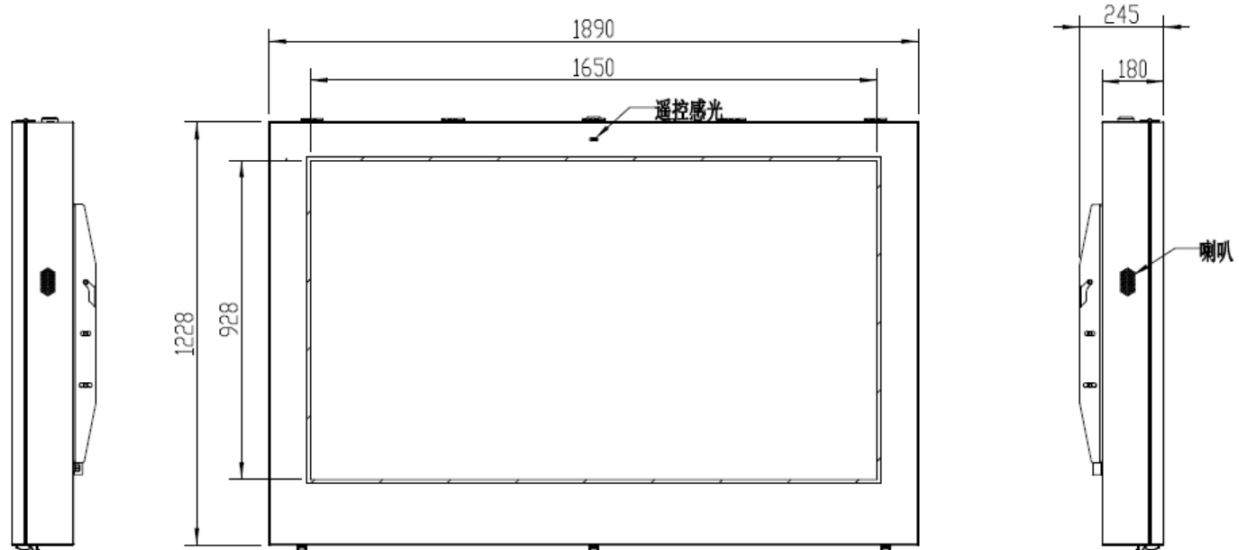

(Dimensions might be adaptable by different enclosures and heat-control systems.)

DECLARE:

Pictures and Parameters here are for reference only. **SUNTUNE SignageHub has the rights for final explanations.**

Website: www.suntunesignage.com Hotline: (+86) 188-2025-4103 Email : info@suntunesignage.com

Address : Bldg F10, Gangshen Center, Xinniu Rd, Minzhi Str, Longhua Dist., Shenzhen 518131, Guangdong, China.

PHYSICAL PICTURE REFERENCE**75 inch Wall-mounted Rainproof Advertising Display**