

43 Inch Battery-powered Outdoor Display**KEY FEATURES**

A+ LCD IPS Panel
 FHD 1920x1080
 Brightness ≥ **1500 nits**
 7*24 Hours working uninterrupted

Energy-saving WLED backlight,
 Weather-proof, Sun-readable,
 Auto-Light sensor, Anti-dust, Anti-vandalism
 Anti-radiation, Anti-electromagnetic
 Tempered Glass: RG, AG, AR or Laminated

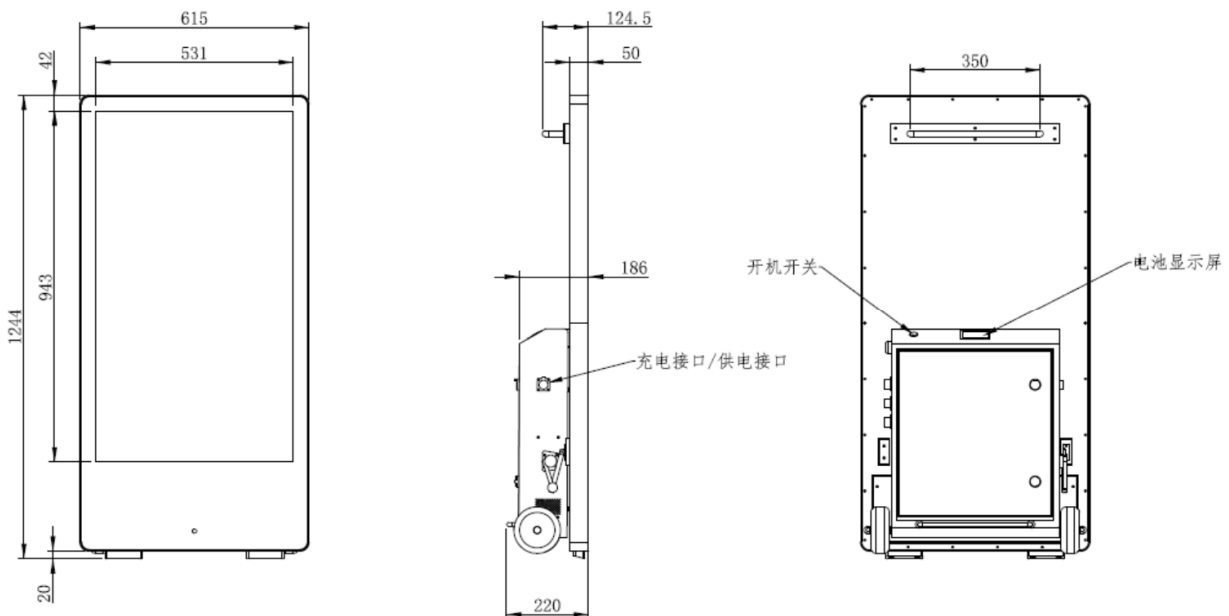
Optional:

1. Player alone / Network / Touchscreen
2. IP Rating: IP55 / IP67
3. OS: Windows / Android / Linux / None
4. Color Options: Grey, White, Black...

PICTURE**Specification Table:**

Digital Signage Size		43"
Model Number		ST- MD-M43BM
PANELS	Panel Type	A+ LCD IPS Panel 43 inch
	Active Area	941.2x529.3 mm (W*H)
	Aspect Ratio	16:9
	Backlight	Patented LED module + Constant power components
	Resolution	1920x1080 Max to 3140x2160 (4K)
	Display Colors	16.7M / 1.07B
	Brightness	1500+ nits Sunlight-readable
	Contrast Ratio	1200:1
	Visual Angle	178°(H) / 178°(V)
	Response Time	≤5ms
	S-System	PAL / NTSC / SECAM
	Life Expectance	60000 Hours
FUNCTIONS	OS	Windows, Android, Linux
	Network	Ethernet, Wi-Fi, 4G, 5G, etc
	Network Protocol	TCP IP/PPPOE/ICMP/DHCP/DNS/FTP/HTTPS
	Audio Format	MP3,WMA,AMR,OGG,AAC,WAV,FLAC,APE
	Video Format	MP4,3GP,MPG,AVI,WMV,FLV,SWF,RMVB,MKV,VOB
	Image Format	JPG,BMP,PNG,TIF,ICO,GIF,TGA
	Supportive	Player Alone, Network, Touch Screen

HARDWARE	Materials	Cold-rolled metal plate + special Outdoor Powder
	Color Options	Silver, Grey, White, Black or customized
	Heat Control	Industrial Air-cooling system Air-conditioner system
	Tempered Glass	6-8 mm (AG, AR or Laminated only in requirement)
	IP Rating	Air-cooling≤IP55 IP67 (Optical bonding)
	Speakers	2*8W Stereo
	I/O Connectivity	DP, HDMI, RJ-45, USB, SD Card
	Dimensions	1244x615x186 MM (for Reference)
	N.W / G.W	55 KG / 76 KG
	Certificates	ISO9001/CCC/CE /FCC/RoHS/IP65
	Accessories	Remote Control, Power Cord, Wires, Key, Rack, Instruction, Approval Certificate, Warranty Card
ENVIRONMENT	Operation Temp	-20°C to 55°C
	Storage Temp	-35°C to 60°C
	Working Humidity	10% to 90%
	Storage Humidity	5% to 95%
POWER	Battery	Lithium iron phosphate battery for outdoor use
	Watts	≤ 110W (by motherboard and heat-control system)
	Battery Capacity	62000mAh
	Battery Life	Charging time 8 hours, Maximum endurance 18 hours

DIMENSION REFERENCE:

(Dimensions might be adaptable by different enclosures and heat-control systems)

REMARK

Pictures & Parameters here are for reference only. All referred to physical Products. Final explanations belong to SUNTUNE SignageHub.

Website: www.suntunesignage.com Hotline: (+86) 188-2025-4103 Email : info@suntunesignage.com

Address : Bldg F10, Gangshen Center, Xinniu Rd, Minzhi Str, Longhua Dist., Shenzhen 518131, Guangdong, China.

