

## 65 inch Double-sided Outdoor Wayfinding Kiosk

### KEY FEATURES

A+ LCD panel  
 1920x1080 FHD, MAX to 3840x2160 (UHD)  
 Brightness ≥ **2500** nits  
 7\*24 Hours working uninterrupted

Energy-saving WLED backlight  
 Weatherproof, Sun-readable, Auto-light sensor  
 Anti-dust, anti-thunder, Vandal-proof (Locks&Key),  
 Anti-radiation, Anti-electromagnetic  
 Protective: AR 6mm tempered glass

Optional:

1. Plug and Play | Network | Touchscreen
2. Fan-cooling≤IP55 | Air-conditioning≥IP65
3. Linux, Android, Windows
4. Grey, White, Black...Customizable

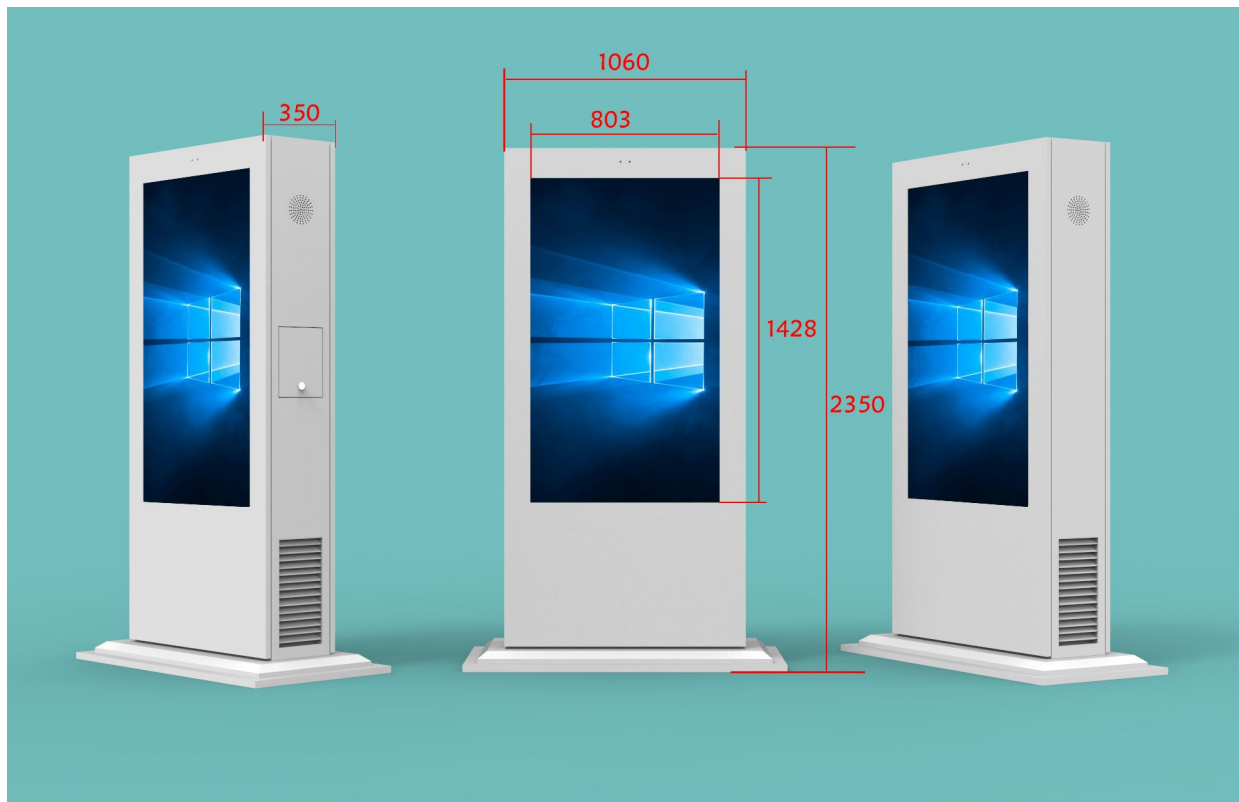
### PICTURE



### Specification Table:

|                      |                  |                                                 |
|----------------------|------------------|-------------------------------------------------|
| Digital Signage Size |                  | 65"                                             |
| Model Number         |                  | ST-NTK-F65DM02                                  |
| PANELS               | Panel Type       | A+ LCD IPS Panel 65 inch                        |
|                      | Active Area      | 1428.5×803.5 mm (W*H)                           |
|                      | Aspect Ratio     | 16:9                                            |
|                      | Backlight        | Patented LED module + Constant power components |
|                      | Resolution       | 1920x1080; Max to 3840x2160 UHD                 |
|                      | Display Colors   | 16.7M/1.07B 87% (CIE1931)                       |
|                      | Brightness       | 2500+ nits Sunlight-readable                    |
|                      | Contrast Ratio   | 1400:1                                          |
|                      | Visual Angle     | 178°(H) / 178°(V)                               |
|                      | Response Time    | ≤ 5ms                                           |
|                      | S-System         | PAL / NTSC / SECAM                              |
|                      | Life Expectancy  | 60000 Hours                                     |
| FUNCTIONS            | Operation System | Windows, Android, Linux                         |
|                      | Network          | Ethernet, Wi-Fi, 4G, 5G, etc                    |
|                      | Network Protocol | TCP IP/PPPOE/ICMP/DHCP/DNS/FTP/HTTPS            |
|                      | Audio Format     | MP3,WMA,AMR,OGG,AAC,WAV,FLAC,APE                |
|                      | Video Format     | MP4,3GP,MPG,AVI,WMV,FLV,SWF,RMVB,MKV,VOB        |
|                      | Image Format     | JPG,BMP,PNG,TIF,ICO,GIF,TGA                     |
|                      | Supportive       | Player Alone, Network, Touch Screen             |

|                    |                  |                                                                                                |
|--------------------|------------------|------------------------------------------------------------------------------------------------|
| <b>HARDWARE</b>    | Materials        | Cold-rolled metal plate + special <b>Outdoor Powder</b>                                        |
|                    | Color Options    | Silver, Grey, White, Black or customized                                                       |
|                    | Heat Control     | Industrial Air-cooling system   Air-conditioner system                                         |
|                    | Tempered Glass   | 6-8 mm (AG, AR or Laminated only in requirement)                                               |
|                    | IP Rating        | Air-cooling $\leq$ IP55   Air-conditioner $\geq$ IP65                                          |
|                    | Speakers         | 2*10W Stereo                                                                                   |
|                    | I/O Connectivity | DP, HDMI, RJ-45, USB, Customizable                                                             |
|                    | Dimensions       | 2350x1060x350 MM (for Reference)                                                               |
|                    | N.W / G.W        | 196KG / 248 KG                                                                                 |
|                    | Certificates     | ISO9001/CCC/CE /FCC/RoHS/IP65                                                                  |
|                    | Accessories      | Remote Control, Power Cord, Wires, Key, Rack, Instruction, Approval Certificate, Warranty Card |
| <b>ENVIRONMENT</b> | Operation Temp   | -30°C to 55°C                                                                                  |
|                    | Storage Temp     | -35°C to 60°C                                                                                  |
|                    | Working Humidity | 5% to 95%                                                                                      |
|                    | Storage Humidity | 5% to 95%                                                                                      |
| <b>POWER</b>       | Voltage          | AC 100V - 240V                                                                                 |
|                    | Consumption      | 1800W – 4000W (by the heat-control systems)                                                    |
|                    | Standby          | $\leq$ 3W                                                                                      |
|                    | Power Mode       | Manual   Automatic Timer-setting On or Off                                                     |

**ILLUMINATION DRAWING:**

(Dimensions might be adaptable by different enclosures and heat-control systems)

