

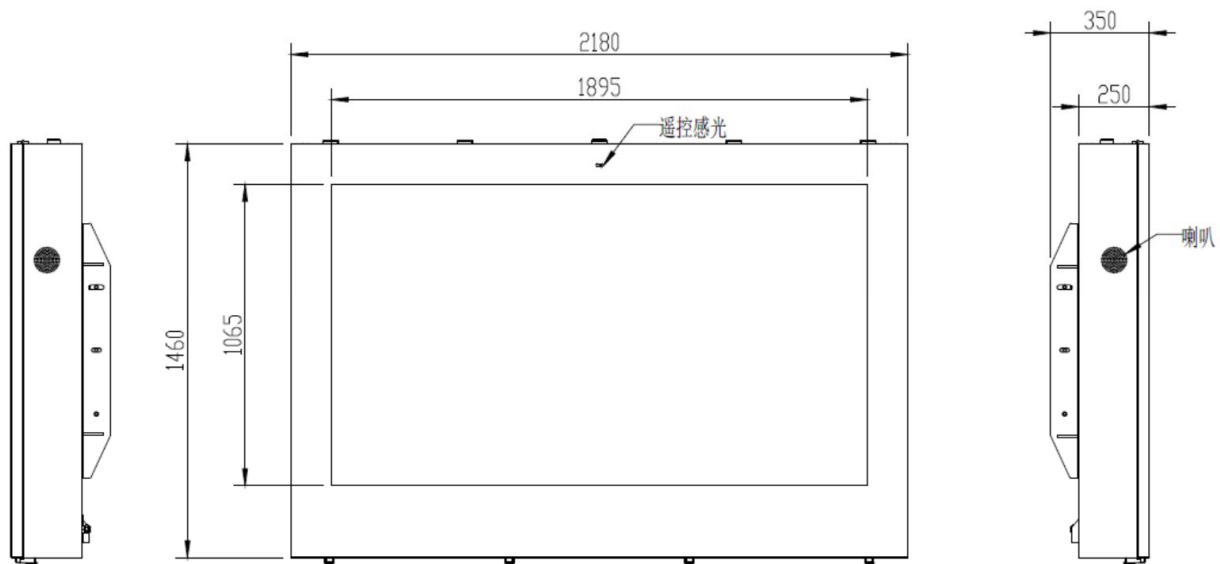
86 inch Wall-mounted Ultra-bright Outdoor Signage

KEY FEATURE	PICTURE
A+ LCD panel 3840 x 2160 (UHD) 7*24 Hour working uninterrupted High brightness (2500+ nits) Auto-light sensor. All-weatherproof Vandal-proof, Anti-dust, Anti-thunder Anti-glare, Anti-electromagnetic Protective: 6+ mm tempered glass Optional: 1. Plug and Play Network Touch 2. IP55 with Fan-cooling System 3. IP65 with Air-conditioner System 4. Android Windows Linux 5. Black, Grey, White,...Customizable	

Specification Table:

Digital Signage Size		86"
Model Number		ST- HBD-W86R
PANELS	Panel Type	A+ LCD Panel 86 inch (IPS)
	Active Area	1895.04x1065.96 mm (W*H)
	Aspect Ratio	16:9
	Backlight	Patented LED module + Constant power components
	Resolution	UHD 3840x2160 compatible to 1920x1080
	Display Colors	1.07B 85% (CIE1931)
	Brightness	2000+ nits Sunlight-readable
	Contrast Ratio	1400:1
	Visual Angle	178°(H) / 178°(V)
	Response Time	≤ 5ms
	S-System	PAL / NTSC / SECAM
	Life Expectance	60000 Hours
FUNCTIONS	OS	Windows, Android, Linux
	Network	Ethernet, Wi-Fi, 4G, 5G, etc
	Network Protocol	TCP IP/PPPOE/ICMP/DHCP/DNS/FTP/HTTPS
	Audio Format	MP3,WMA,AMR,OGG,AAC,WAV,FLAC,APE
	Video Format	MP4,3GP,MPG,AVI,WMV,FLV,SWF,RMVB,MKV,VOB
	Image Format	JPG,BMP,PNG,TIF,ICO,GIF,TGA
	Supportive	Player Alone, Network, Touch Screen

HARDWARE	Materials	Cold-rolled metal plate + special Outdoor Powder
	Color Options	Silver, Grey, White, Black or customized
	Heat Control	Industrial Air-cooling system Air-conditioner system
	Tempered Glass	6-8 mm (Optional with AG, AR or Laminated)
	IP Rating	Air-cooling $\leq$ IP55 Air-conditioner $\geq$ IP65
	Speakers	2*10W Stereo
	I/O Connectivity	DP, HDMI, RJ-45, USB, SD Card
	Dimensions	2180x1460x250 MM (for Reference)
	N.W / G.W	276 KG / 300 KG (for Reference)
	Certificates	ISO9001/CCC/CE /FCC/RoHS/IP65
	Accessories	Remote Control, Power Cord, Wires, Key, Rack, Instruction, Approval Certificate, Warranty Card
ENVIRONMENT	Operation Temp	-20°C to 55°C
	Storage Temp	-35°C to 60°C
	Working Humidity	10% to 90%
	Storage Humidity	10% to 90%
POWER	Voltage	AC 100V - 240V
	Consumption	3000W (Due to motherboard and heat-control system)
	Standby	$\leq$ 3W
	Power Mode	Manual Automatic Timer-setting On or Off

ILLUMINATION DRAWING**DECLARE:**

**Pictures & Parameters here are for reference only. All referred to physical Products.
Final explanations belong to SUNTUNE SignageHub.**

PHYSICAL PICTURE REFERENCE for the 86 inch Wall-mounted Ultra-bright Outdoor Signage